


A Assembly Instructions **X-Pyramide Maxi, Art. No. 4640-1**

Attention! Only use the assembly instruction included in the scope of delivery for the assembly, installation and maintenance of the respective equipment!

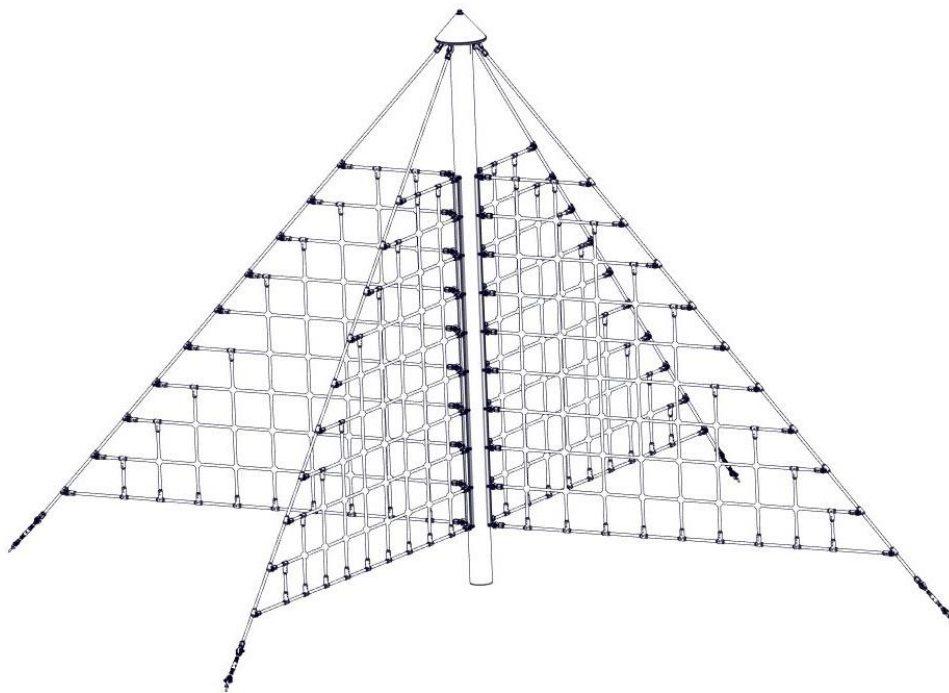

Operator: _____

Location: _____

Revisionshistorie
Revision 0 – 2015-10-21
Erste freigegebene Version FH
Montageanleitung
Revision 5 - 2024-12-11
Mastschuh am Netzwerk ZM
Alle Rechte vorbehalten
© Copyright 2015 Huck Seiltechnik GmbH

**Please note the explanations and abbreviations and notes.
For any queries please contact the manufacturer**

Contents

A	Assembly Instructions X-Pyramide Maxi Art. No. 4640-1.....	1
1	Introduction Assembling.....	4
2	Datasheet X-Pyramide Maxi, Art.No. 4640-1.....	5
3	Delivery contents (parts list with part numbers)	7
4	Erection instructions	11
5	Post installation checks	21
B	Maintenance instructions X-Pyramide Maxi Art. No. 4640-1	23
6	Introduction Maintenance.....	25
7	General maintenance information	26
8	Maintenance timetable.....	28
9	Regular maintenance (picture).....	29
10	Monthly maintenance	30
11	Quarterly maintenance	30
12	Half yearly maintenance	31
13	Annual maintenance	31
14	Maintenance printout.....	33
15	Hand over document	35

List of Tables

Tabelle 3-1: Delivery contents, in words	7
Tabelle 3-2: Delivery contents, in symbols	8

1 Introduction Assembling

1.1 General information

This equipment should be installed, inspected, maintained and operated in accordance with EN1176-7 guidelines.

Before installation work commences, please check that you have all of the equipment and fixation components in the parts list provided (see Tables 3-1 and 3-2).

Please consider that the installation has to be carried out only on even terrain (max.slope up to 3%).

Any spare parts that may be required can be obtained directly from your supplier or from Fa. Huck Seiltechnik GmbH

Adress: Huck Seiltechnik GmbH
 Dillerberg 3
 D-35614 Asslar/Berghausen
 Tel. +49 6443 83 11-0
 Fax +49 6443 83 11-79

Please do not hesitate to call your supplier if you have any problems during installation or with any other questions. You can reach us at the following
Tel. +49 6443 83 11- 0



Following installation, complete assembly instructions, maintenance instructions and a maintenance record must be sent to the operator who must confirm receipt in writing. See the last page of this document.



All nuts and bolts are hot-dip galvanised or stainless steel. One of the characteristics of stainless steel is that uncontrolled cold welding may occur when the nuts are tightened. To prevent this, it is necessary to spray the nuts and bolts with Teflon spray or another similar lubricant.

We hereby confirm that this play equipment has been tested and certified in accordance with the play equipment standard EN 1176.

2 Datasheet X-Pyramide Maxi, Art.No. 4640-1

1. Space requiremt: 5.45 m x 5.45 m
 Safety zone: 7.85m x 7.85 m
 Total ground height 4.20 m
 Fall height 3.00 m

2. Required safety surface:

Surface material	Description mm	Minimum thickness of layer mm	Maximum height of fall mm
Topsoil grass			<= 1000
Chipped bark	20 – 80 grain size	300 400	<= 2000 <= 3000
Wood chippings	5 – 30 grain size	300 400	<= 2000 <= 3000
Sand	0,2 – 2 grain size	300 400	<= 2000 <= 3000
Gravel	2 – 8 grain size	300 400	<= 2000 <= 3000
Other ground materials	As recommended by manufacturer		

Name and overall dimension of the largest component:

1 x Steel post length 5.00 m, Ø 159 mm (114 kg)

Name and weight of the heaviest component:

Steel post: 114 kg

Intended age group: 6 years and over



Attention

Please note that this equipment is set in concrete.

Concrete: C25/30

Required concrete ~1,15 m³

Foundations/area to be excavated:

excavated (All foundations must be brought to equal level!)

Foundations:

4 x 0.60 m long x 0.60 m wide, total depth 0.60 m

1 x 0.70 m long x 0.70 m wide, total depth 0.60 m

Area to be excavated:

4 x 0.60 m long x 0.60 m wide, total depth 1.10 m including 10 cm drainage

1 x 0.70 m long x 0.70 m wide, total depth 1.10 m including 10 cm drainage

Round off foundation edges (min.R = 100 mm)!

Sizes of foundations are designed for soils class "4-5" (natural ground).

Soil class 3: Non-cohesive to slightly cohesive plasticity, sand, gravel, and sand-gravel mixtures, with very small amount of stones (amount > 30% with bigger diameter of 63 mm grain size)

Soil class 4: soft to medium plasticity, interleave bound, with minor portion of stone (portion < 30% with bigger diameter of 63 mm grain size)

Soil class 5: **Soil class 5:** ground with soil class 3 and 4 with big portion of stones (portion > 30% with bigger diameter of 63 mm grain size)

ATTENTION: IN CASE OF SANDY AND SOFT SOILS THE FOUNDATIONS HAVE TO BE FORMED ABOUT 50% BIGGER IN THE SURFACE AREA.



Attention

Assembly time, once foundations complete: 3 hours.

Required assistance: 3 persons.

Required tools: ladder approx. 4 m long, spirit level, various wrenches, levelling control

Any spare parts which may be required can be obtained directly from your supplier or from Fa.Huck Seiltechnik GmbH

Adress: Huck Seiltechnik GmbH
 Dillerberg 3
 D-35614 Asslar/Berghausen
 Tel. +49 6443 8311-0
 Fax +49 6443 8311-79

We hereby confirm that this item of play equipment has been tested and certified in accordance with the play equipment standard EN 1176-1.

Drawings / Views

All optical drawings are showing only the measurements/dimensions and are no mandatory technical views of the complete item.

We reserve the right to change technical details of our articles which are serving for the further development of our articles and are reasonable for the customer.

Measurement tolerances

Because of the properties and characteristics of the components, minor measurement tolerances compared to the indication on the sketches are possible.

This concerns all shown measurements except the foundation measurements resp. measurements below upper edge ground level/play area.

3 Delivery contents (parts list with part numbers)

3.1. In words

Table 3-1: Delivery contents, in words

Pos.	Quantity	Element / Description	Size	O.K.	Missing
1	1	Steel post with welded lugs	Ø 159 x 6,3 mm 5.00 m long		
2	1	Play part incl. mast shoe (vo)			
3	1	Mast cap red	Ø 360 mm,		
4	1	Concreting clamp incl. threaded bolt + 2x hexagon nut	M10 x 110 mm		
5	1	Threaded bolt, Nut, Nylock nut, Washer, Nut cap	length of thread bolt M16 x 165 mm		
6	1	10er Anker chains	length 1200 mm		
7	4	Shackle curved vz	M8		
8	40	VA shackle with stop nut	M6 galvanised		
9	1	Steel base plate lamella plug	500 x 500 mm SFL13		
10	4	lamella plug	SFL13		
11	4	Ground pins (plastic)			
12	1	Eyebolt	M16 x 35 mm		
13	2	Loctite	3 ml		
14 		Middle Foundation Pipe (provided by Customer) 1 piece	ca. Ø 250 mm, 650 mm long		

3.2. In symbols

Table 3-2: Delivery contents, in symbols

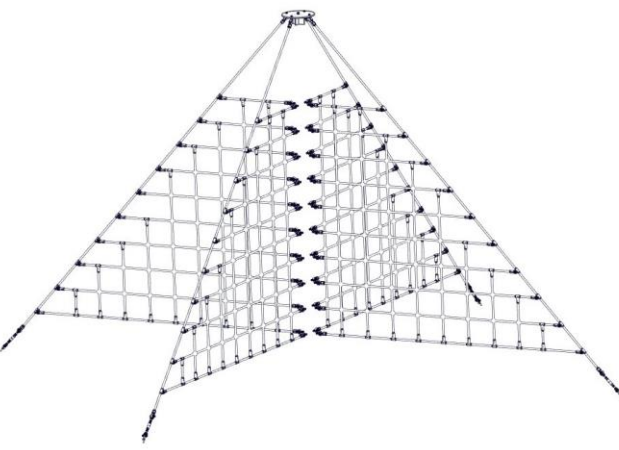





Pos.	Quantity	Symbol
1		 Steel post Ø 101.6 x 2.9 mm 5.00 m long
2		 Play part incl. mast shoe (vo)
3	1	 Mast cap Ø 360 mm
4	1	 Concreting clamp incl. threaded bolt + 2x hexagon nut
5	1	 Threaded bolt, Nut, Nylock nut, Washer, Nut cap length of thread bolt M16 x 165 mm
6	4	 10er Anker chains 1200 mm long

Table 3-2: Delivery contents, in symbols


Pos.	Quantity	Symbol
7	4	 Shackle M8 curved vz
8	40	 6er Shackles galvanized short
9	1	 Steel Base Plate 500 x 500 mm
10	4	 lamella plug SFL13
11	4	 Ground pins
12	4	 Eyebolt M16x35 mm
13	2	 Loctite 3 ml
14 		 Middle Foundation Pipe (provided by Customer) 1 piece ca. Ø 250 mm, 650 mm long

	<u>Explanations of abbreviations and symbols :</u> Version: X-Pyramide Maxi
AB	Pay attention to the required concrete setting time!
D	C25/30 concrete (for foundations) Required concrete: 1,15 m ³
F	Fall protection
G	Drainage layer 10 cm
LzFa	Align lugs to the foundation
KNR	Foundation pipe – (provided by customer!!!)
LRB	Fill space between pipe and steel post with concrete .
RSE	Remove eyebolt
M.Lot !!	Install post vertically
O.K	Upper edge of playing level
PS	safety zone ~69,2 m ²
R	Radius
VO	vormontiert
	<u>Round off foundation edges (min.R = 100 mm)! must be carried rounded</u> <u>Sizes of foundations are designed for soils class“4-5” (natural ground).</u> <u>Soil class 3:</u> Non-cohesive to slightly cohesive plasticity , sand, gravel , and sand-gravel mixtures , with very little portion of stones (portion > 30% with bigger diameter of 63 mm grain size) <u>Soil class 4:</u> soft to medium plasticity, interleave bound, with minor portion of stone (portion < 30% with bigger diameter of 63 mm grain size) <u>Soil class 5:</u> <u>Soil class 5:</u> ground with soil class 3 and 4 with big portion of stones (portion > 30% with bigger diameter of 63 mm grain size) ATTENTION: IN CASE OF SANDY AND SOFT SOILS THE FOUNDATIONS HAVE TO BE FORMED ABOUT 50% BIGGER IN THE SURFACE AREA.


See drawings for details!

4 Erection instructions

Safety zone

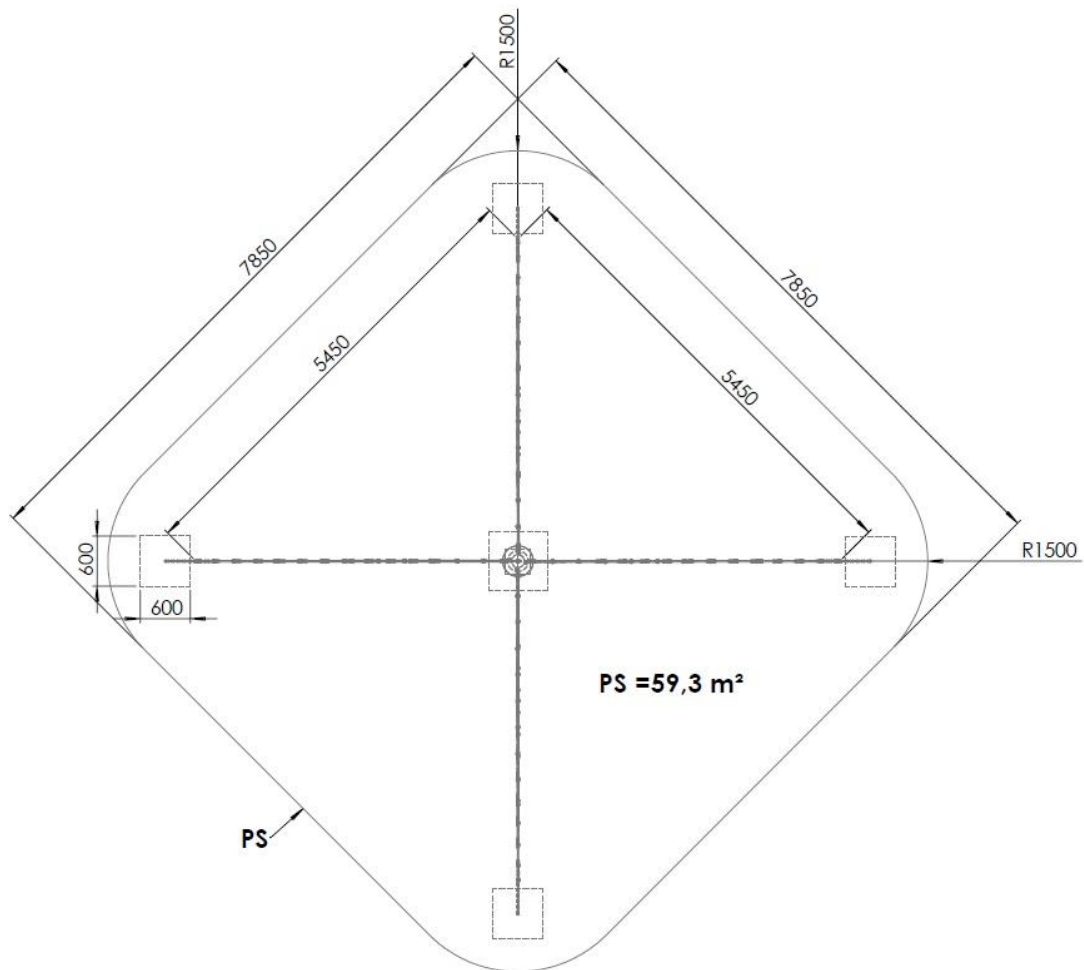


Screw locking device!

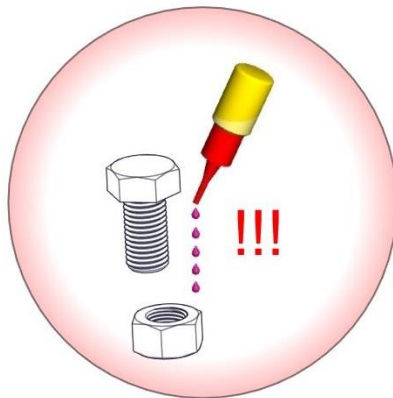



**glue all screws, nuts and sleeves with loctite.
(not less than 5 drops !)
(except for lock nut)**


Foundation plan - Preview

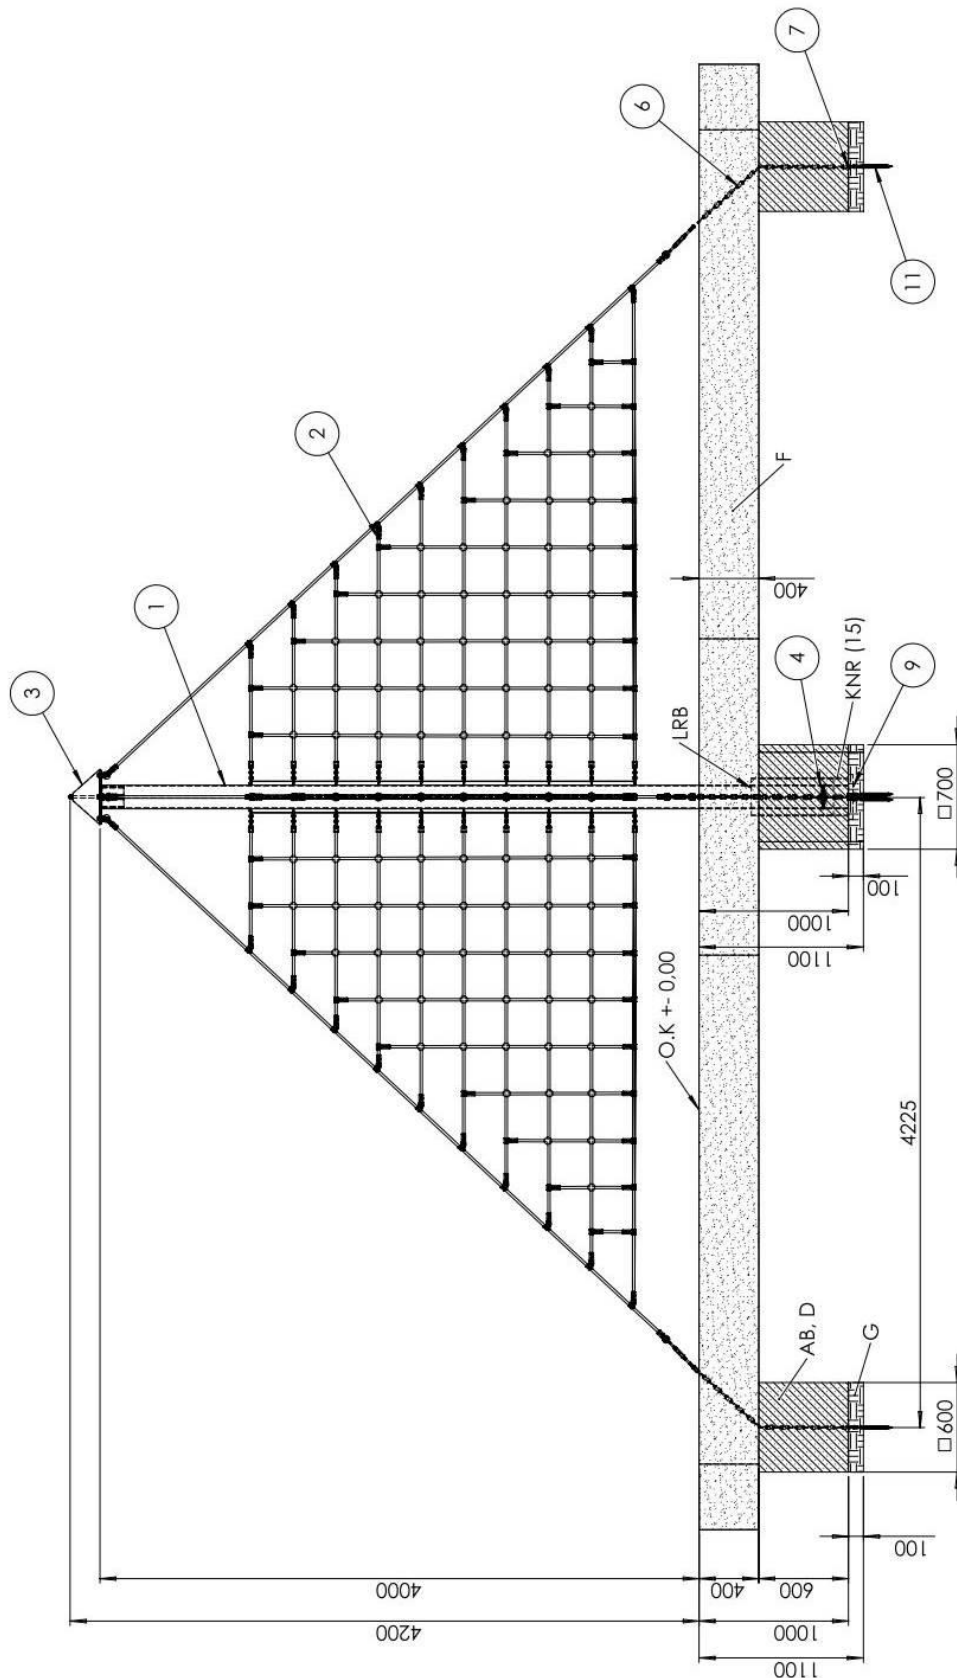



Foundation plan - Top view

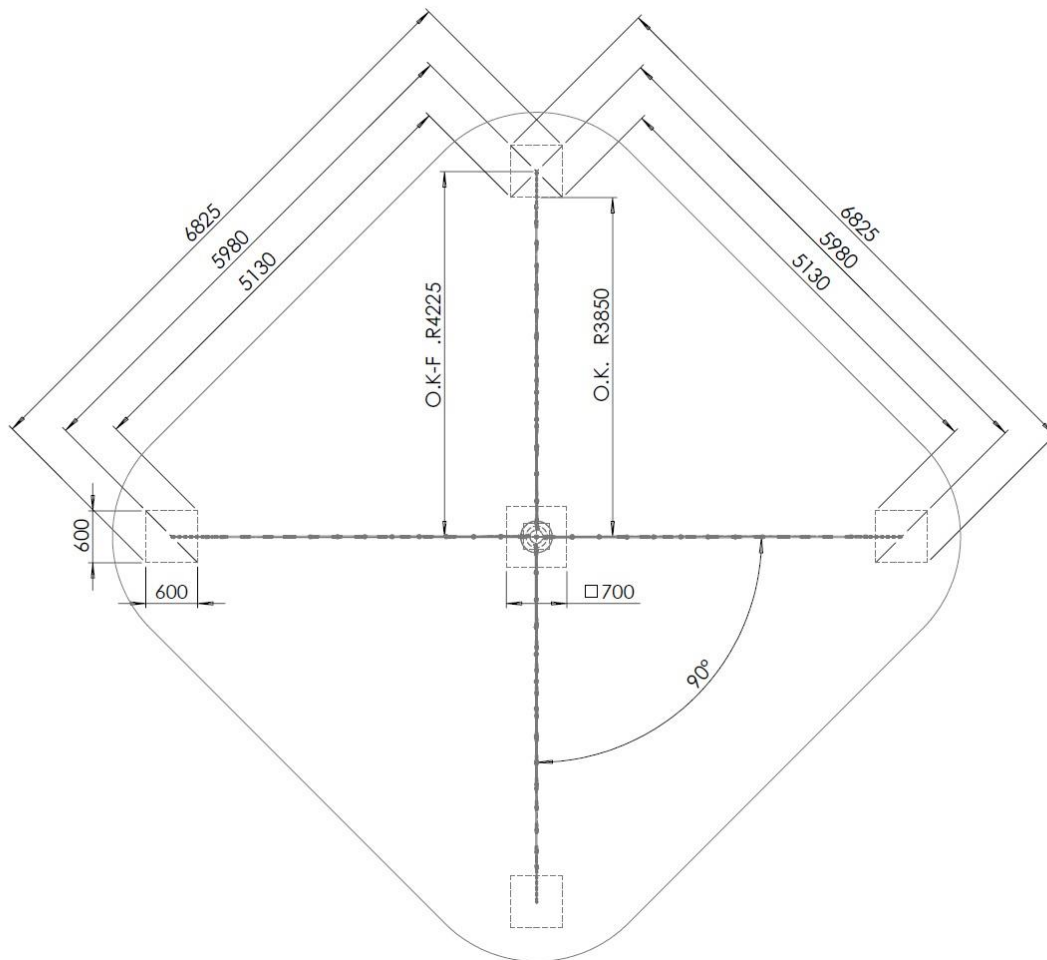


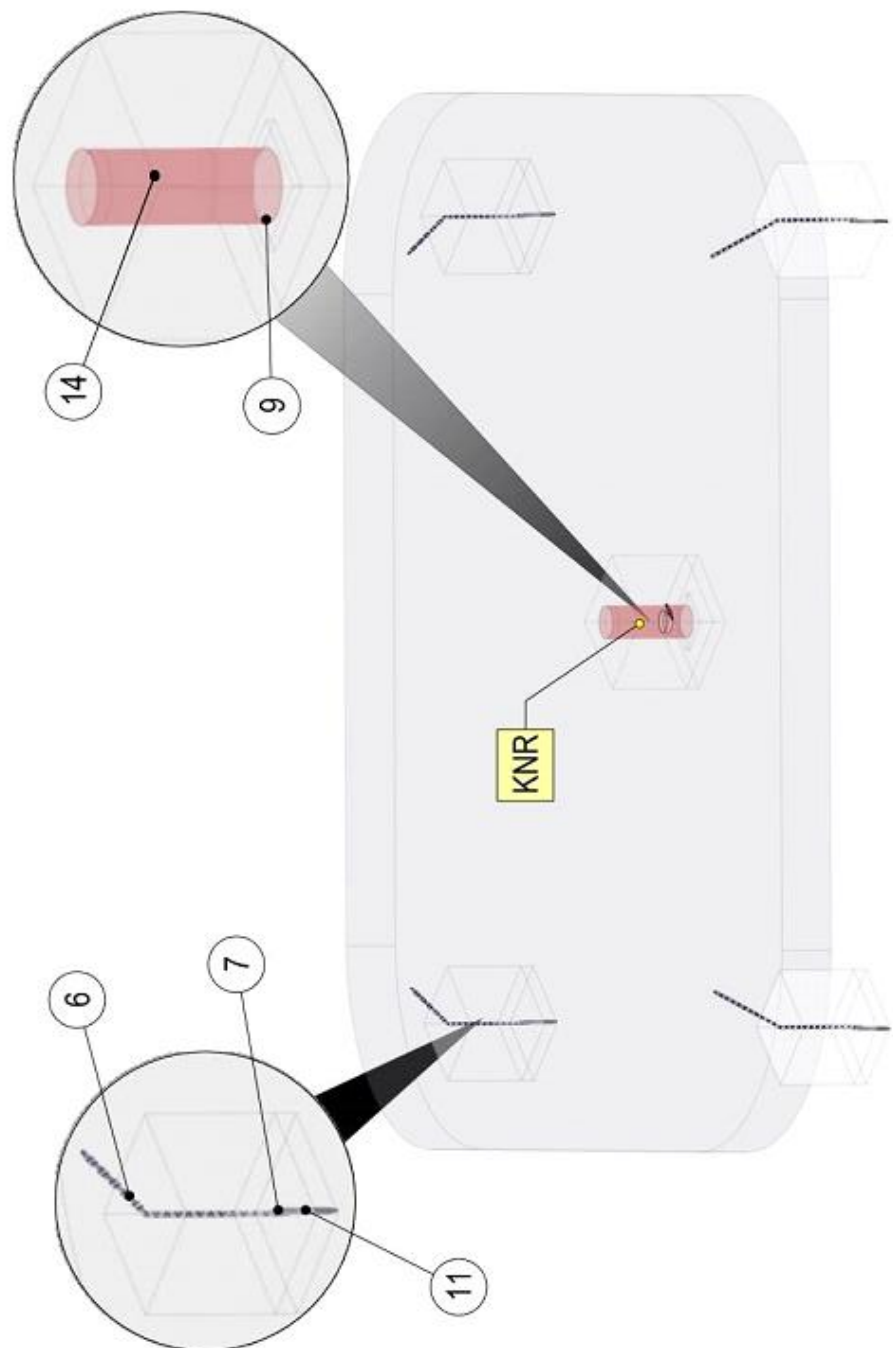

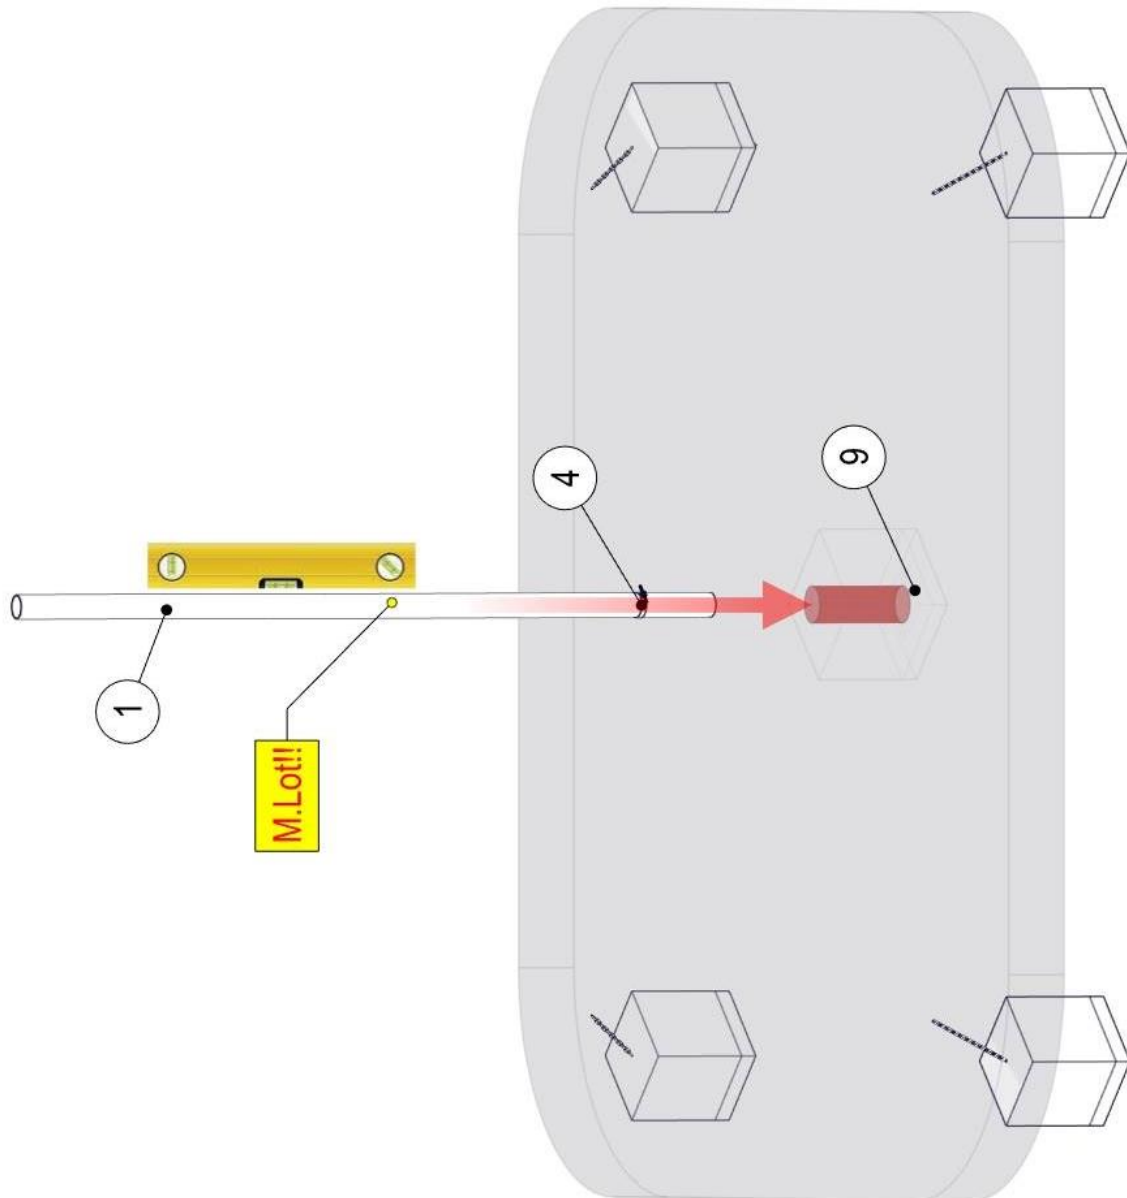


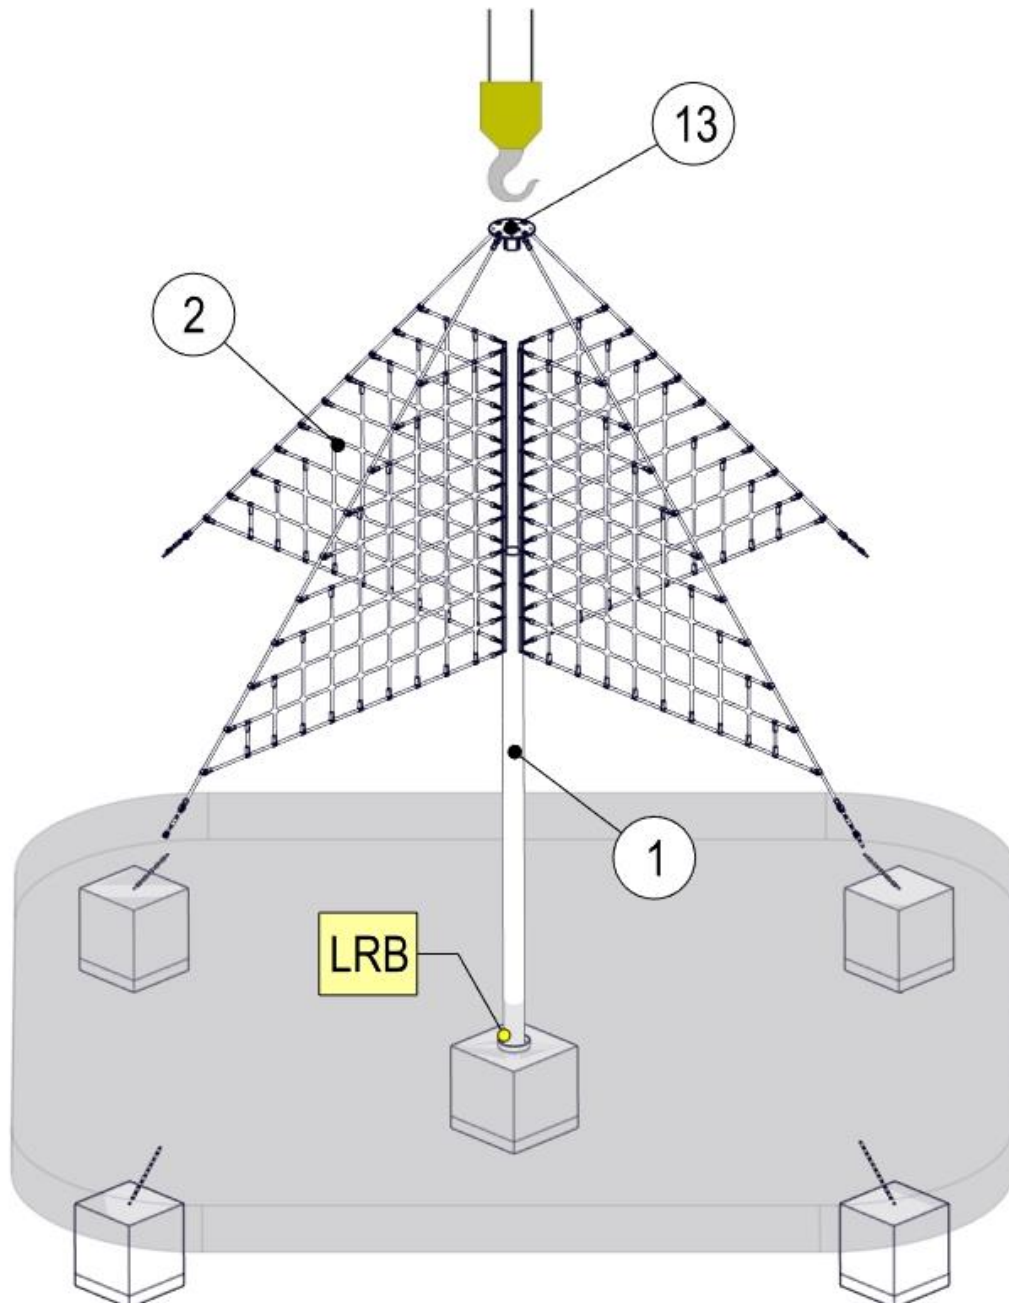

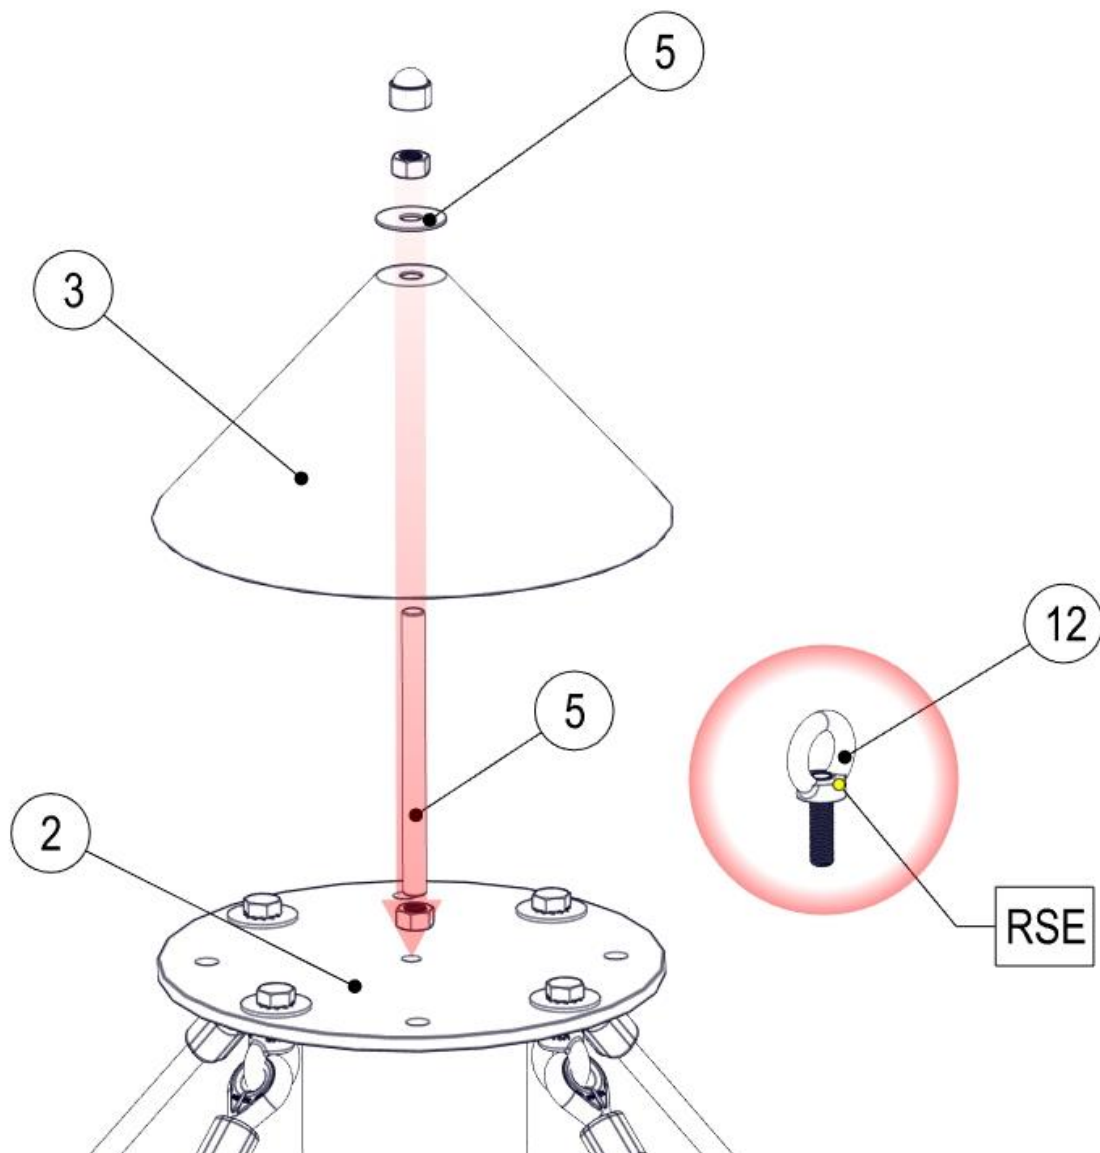

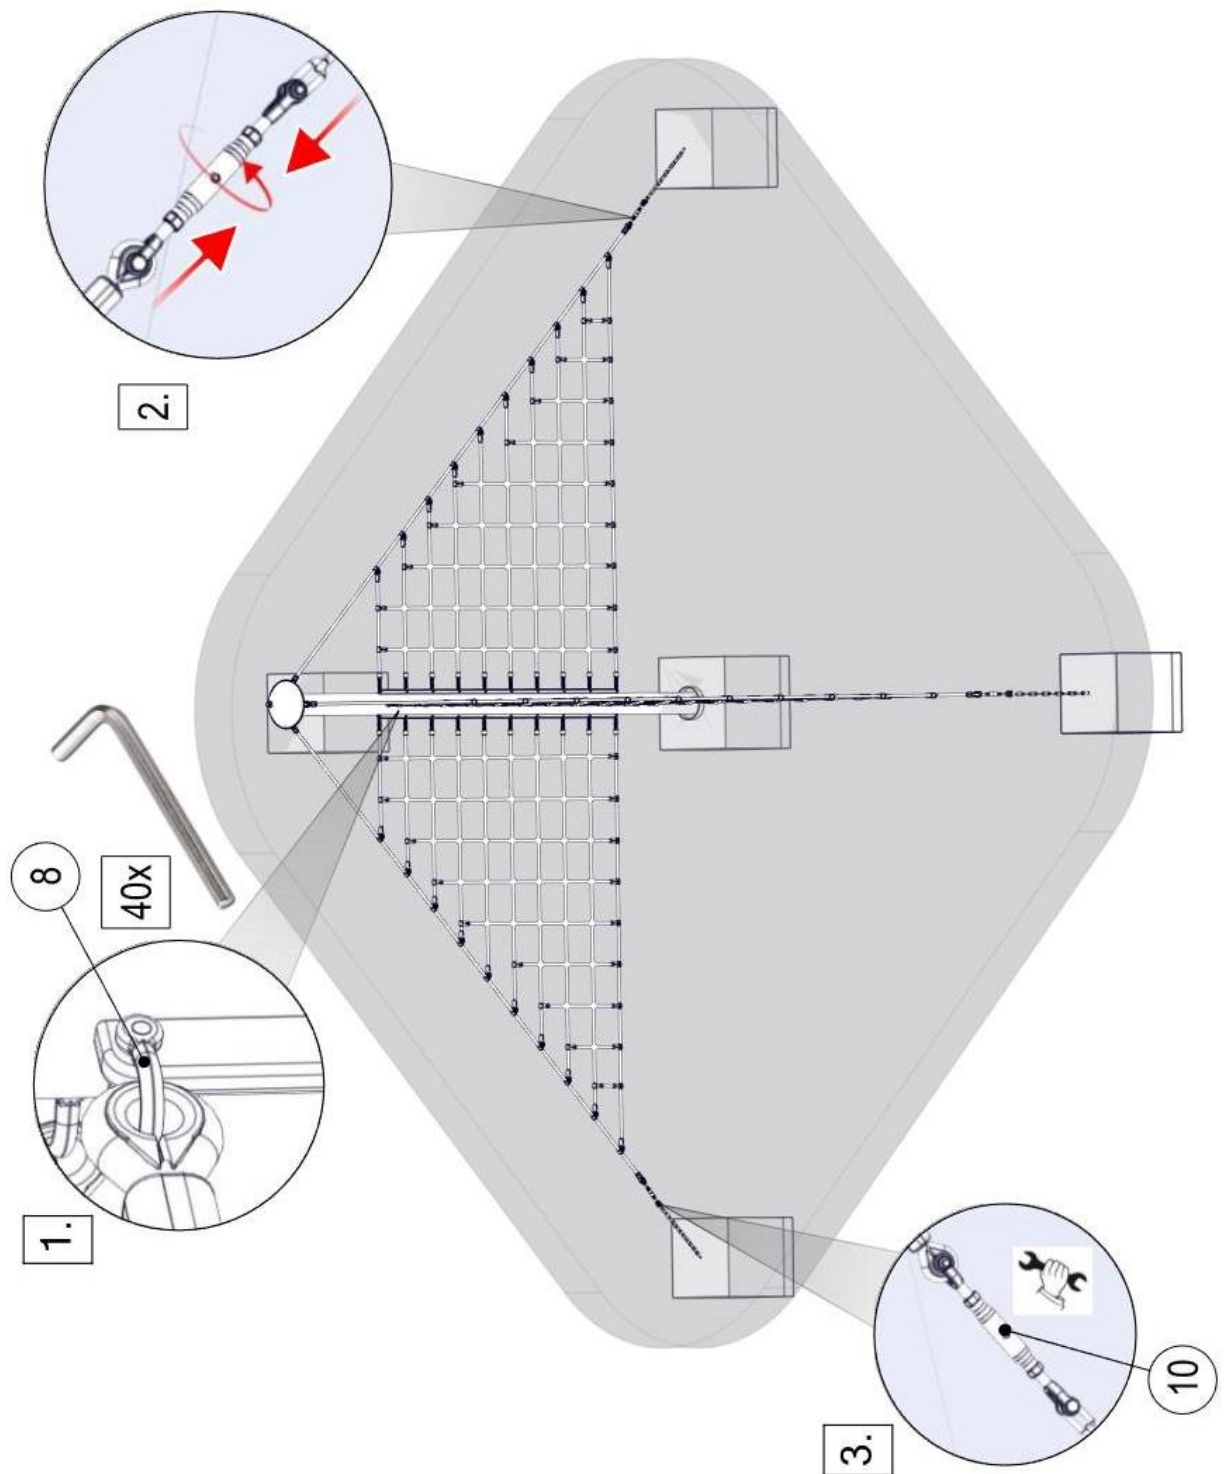

Net – Alignment

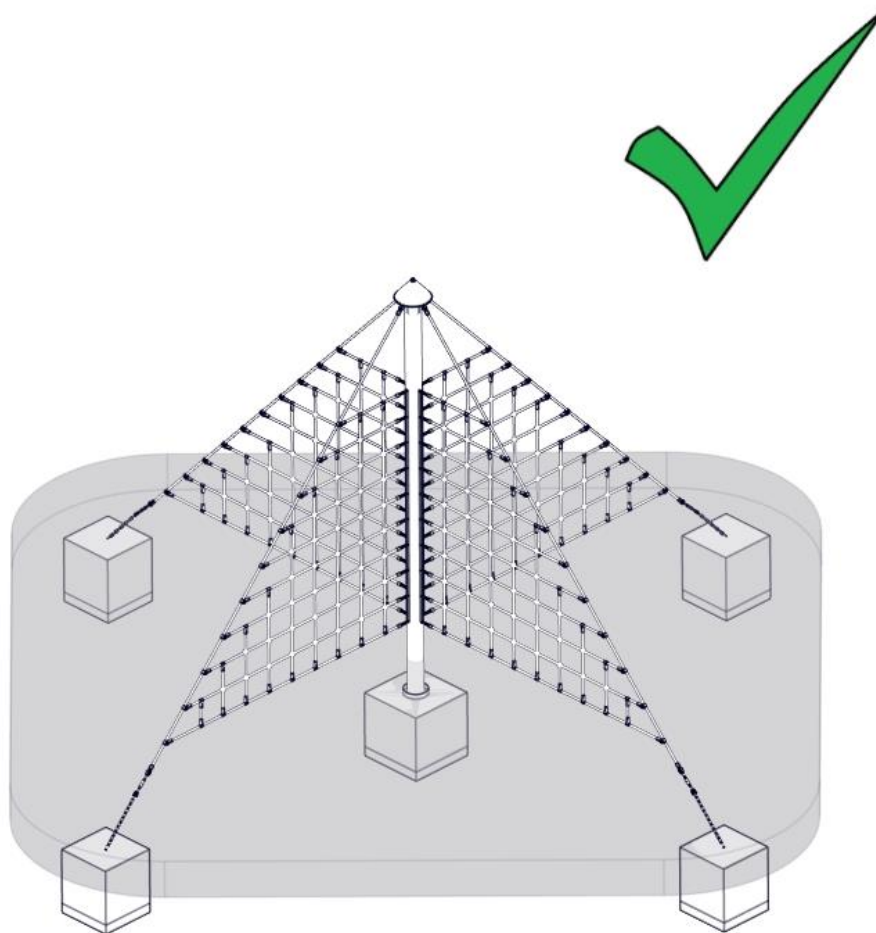

5 Post installation checks



Notice

If the equipment has not been installed safely, you must ensure that the public is prevented from using it.

5.1 Marking filler depth

Labelling the posts to show the depth of material provided as fall protection (i.e. loose filler).

5.2 The equipment has not been installed safely in the following cases:

- Safe equipment installation is not complete.
- The protective surface has not been installed yet.
- Appropriate maintenance work cannot guarantee operational safety.

5.3 Removal of all assembly aids

Please make sure that all assembly aids have been removed from the playing area. The equipment must not be approved for use until this check has been made.

5.4 Information about inspection of the equipment before it is used for the first time

There are no special inspection requirements to be met before the equipment is used for the first time.

5.5 Retighten bolts


After one week of play, please retighten all bolts again. Later upon respective maintenance.

.

B Maintenance instructions

X-Pyramide Maxi

Art. No. 4640-1

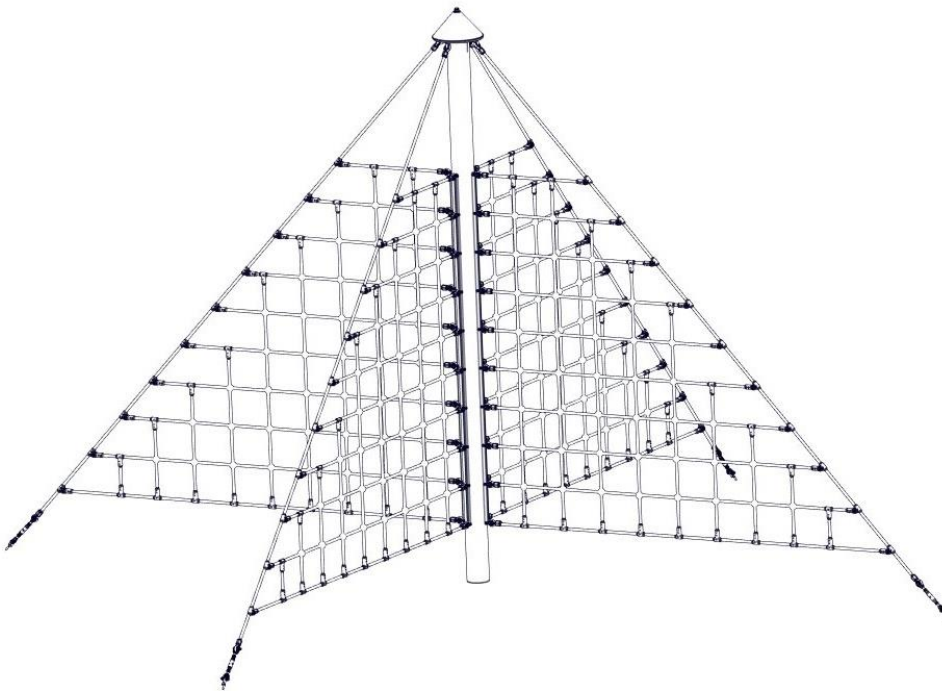

Revisionshistorie
Revision 0 – 2015-10-21
Erste freigegebene Version FH
Montageanleitung
Revision 5 -- 2024-12-11
Mastschuh am Netzwerk ZM
Alle Rechte vorbehalten
© Copyright 2015 Huck Seiltechnik GmbH

6 Introduction Maintenance

6.1 General informations

This equipment should be installed, inspected, maintained and operated in accordance with EN 1176-7 guidelines.



Notice

Please note: Providing any necessary repairs are carried out, a piece of play equipment that is inspected regularly cannot become so damaged that it is dangerous.

Any spare parts which may be required can be obtained directly from your supplier or from Fa. Huck Seiltechnik GmbH

Adress: Huck Seiltechnik GmbH
 Dillerberg 3
 D-35614 Asslar/Berghausen
 Tel. +49 6443 83 11-0
 Fax +49 6443 83 11-79



This equipment should only be assembled, maintained and repaired by **persons with the necessary expertise.**

A copy of the inspection record should be given to the operator, who must confirm receipt.

**This maintenance instruction is based on the standard
“EN 1176-1”.**

7 General maintenance information

7.1 Maintenance intervals

Maintenance intervals are based on average use. Please note that more frequent inspections and/or maintenance are required if the play equipment is subject to intensive use.

7.2 Inspection frequency

The frequency of inspections must be based on actual use. Factors that affect frequency include vandalism, location (e.g. coastal proximity), air pollution and the age of the equipment.

7.3 Maintenance products and procedures

All nuts and bolts are hot-dip galvanised or stainless steel. One of the characteristics of stainless steel is that uncontrolled cold welding may occur when the nuts are tightened. To prevent this, it is necessary to spray the nuts and bolts with Teflon spray or another similar lubricant.

7.4 Spare parts

All spare parts must conform to the manufacturer's specifications.

7.5 Identifying spare parts

All spare parts are listed in the parts list. The parts list follows the installation requirements.

7.6 Special instructions for the disposal of individual equipment components

No special instructions are necessary for the disposal of individual equipment components.

7.7 Special measures during the break-in period

No later than 2 weeks after assembly, all screwed connections should be checked and tightened if necessary.

7.8 Drain openings

All drain holes must be kept clear.

7.9 Maintenance of protective surfaces

Surfaces providing fall protection must also be maintained regularly. It is particularly important to maintain the correct level of loose surface material and add more if necessary.

7.10 Faults



Faults must be repaired as soon as they are detected. If serious defects that compromise safety cannot be repaired straight away, the public must be prevented from using the equipment with immediate effect.

7.11 Loose screws



Loose screws always cause quality problems and put safety at risk. Therefore, loose screws should always be tightened and checks carried out to ensure that there are no missing screws (e.g. look out for holes you can see through).

7.12 Preventing equipment use

Use of the equipment should be prevented in the event of incomplete installation, disassembly, maintenance, repairs and faults.

7.13 Claims/liability for faults

Steel posts and footings are guaranteed if regular maintenance is carried out and recorded in writing. Our general terms and conditions apply. Maintenance first takes place after 3 years. The steel posts must be excavated as far as the concrete foundations and checked for corrosion.

Zinc paint should be applied to any corroded areas and scratches. Check ropes for abrasion. Retreat any that are very worn.

8 Maintenance timetable

8.1 Special advices

8.1.1 Maintenance interval

We strongly advise you to carry out inspections and maintenance work within the specified periods as use of the equipment, the weather and malicious vandalism cause wear and tear that compromises the safety and function of the equipment.

8.1.2 Maintenance intervals in the event of intensive use

Please note that more frequent inspections and/or maintenance are required if the equipment is subject to intensive use.

8.1.3 Faults that compromise safety



Notice

In the event of a fault that compromises safety, quick action must be taken. This may involve repairing it immediately or shutting down and dismantling the equipment.


8.1.4 Faults that compromise function



Notice

Faults that compromise function should also be repaired immediately. Such faults lower the value of the equipment to the user and encourage malicious vandalism, which may render the equipment less safe. Any damage should also be repaired immediately.

9 Regular maintenance

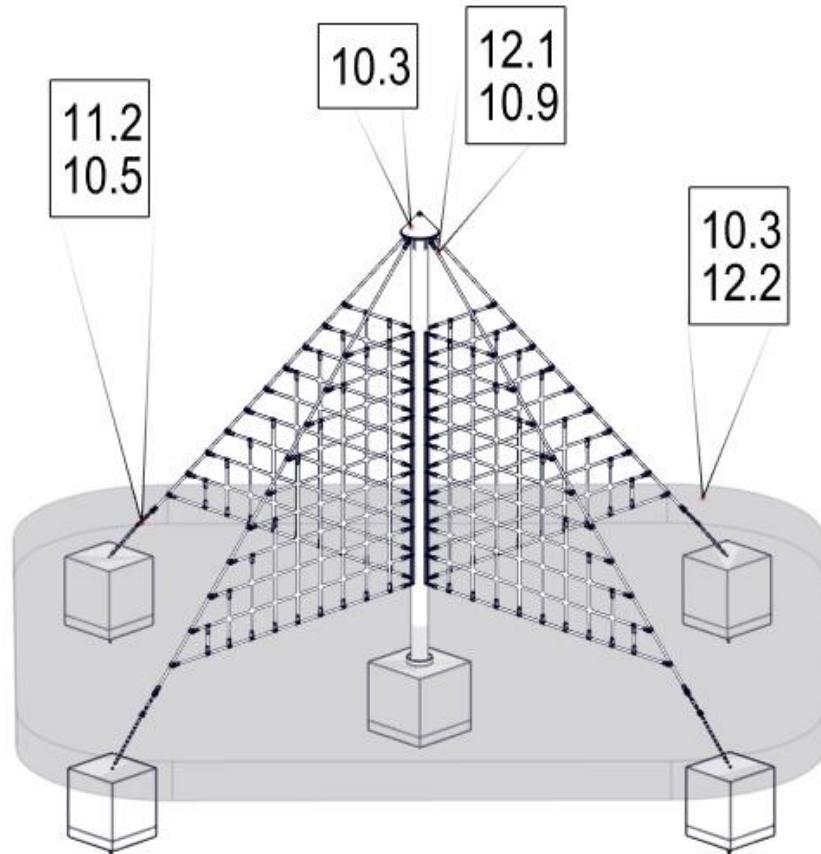

Regular maintenance

10 Monthly maintenance

- 10.1 Check the spaces between the equipment and the ground (clearance and height of fall).**
- 10.2 Check the ground surface in the area with fall protection for hard objects and loose foundations.**
- 10.3 Check all connecting elements and fittings for wear and tear and tighten if necessary. Replace damaged or missing parts.**
- 10.4 Check that moving metal parts (joints, springs, etc.) move smoothly and are not worn. Replace if necessary. It is not necessary to lubricate joints as we only use maintenance-free metal roller bearings.**
- 10.5 Check all attachments such as chains, ropes, nets, etc. for damage and replace if necessary.**
- 10.6 Check rubber parts, sleeves, etc. for wear and tear or damage and replace if necessary.**
- 10.7 Check the surface of wooden parts for damage caused by the weather or external influences and mould. Repair or replace if necessary.**
- 10.8 Check the surface of plastic and metal parts, e.g. slides, for damage and replace if necessary.**

11 Quarterly maintenance

- 11.1 Detailed inspection of the operation and stability of the equipment paying particular attention to any wear and tear.**
- 11.2 Tighten all forms of attachment.**
- 11.3 Repaint and retreat surfaces.**
- 11.4 Maintenance of fall protection surfaces.**
- 11.5 Lubrication of joints.**
- 11.6 Check the height of the fall and top up with loose filler if necessary. If the posts are labelled, top up as far as the mark.**
- 11.7 Retighten all bolts**

12 Half yearly maintenance

- 12.1 Stability (check posts, bracing, foundations, etc.). Ascertaining whether there are any changes in equipment safety as a result of repairs that have been carried out or components that have been added or replaced.

 Attention	Annual Maintenance
---	-----------------------------

13 Annual maintenance

- 13.1 Ascertaining that the equipment, foundations and surfaces are safe for operation.
- 13.2 In particular, the equipment should be checked for decay and corrosion. It may be necessary to dig out or excavate certain components in order to do so. Zinc paint should be applied to corroded areas and scratches.

 Attention	The equipment must be inspected by someone with the necessary expertise in strict compliance with the instructions issued by Huck Seiltechnik GmbH. A copy of the inspection record should be given to the operator, who must confirm receipt.
---	--

14 Maintenance printout

Name of item: X-Pyramide Maxi _____ / Art.-No. 4640-1 _____

Location: _____

Customer or operator: _____
 (Town, Town council, Kindergarten)

Date of inspection	Inspector	O.K.	Accessible	Barriered	Defects	Repaired by	Date

Please copy and return once a year after main inspection has been carried out to the manufacturer by Telefax +49 6443 83 11-79
 Place the confirmation form in your existing play equipment files.

15 Hand over document



After the installation of the equipment pass the installation and maintenance documents to the operator. The operator has to receive the hand over documents. The complete filled and signed hand over document should be sent to the supplier Huck Seiltechnik GmbH per Telefax +49 6443 8311-79

Art.-No.: 4640-1

Type of item: X-Pyramide ´Maxi

Serial number: _____

Customer or operator (Town, Town council, Kindergarten, etc.):

Competent person in charge:

Installation company (address):

Responsible assistant (assembler):

Received the complete assembly instructions, maintenance instructions and maintenance printout.

(Signature of operator)
(Stempel)

(Signature of installation company)

Date: _____